



M23 Straight Connector, Panel Mount, PCB, Front fastened, Coupling screw, with Flange

Male

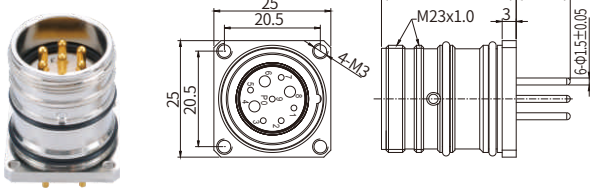

Female

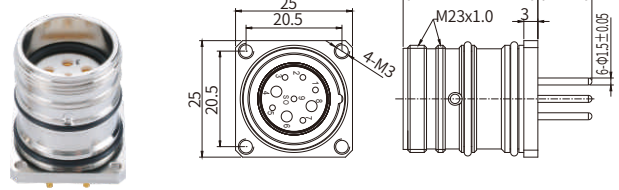

Specifications

Contacts	6A	7A	9A	9B	9C	12A	12B	16A	17A	17B	19A
Certification	ECBT2(ECBT8).E473386										
Pin layout(Male)											
Pin layout(Female)											
Connector insert	PA										
Connector contacts	Brass with gold plated										
Coupling nut/screw	Brass with nickel plated										
Seal/O-ring	FKM or NBR										
Mating Endurance	>800										
Insulation resistance	≥100MΩ										
Contact resistance	≤5mΩ										
Ambient temperature	-40°C ~ +125°C										
Shielding	Unavailable										
IP rating	IP67, IP68 in locked condition										
Panel cut-out	Refer to page 482										
PCB layout	Refer to page 482										
Number of positions	6,7		9(8+1)/(6+3)				12	16		17	19(16+3)
Contacts	6,7	8 / 6	1 / 3				12	16		17	16 / 3
Contact OD(mm)	2.0(14AWG)		1.0(18AWG)	2.0(14AWG)			1.0(18AWG)	1.0(18AWG)		1.0(18AWG)	1.0(18AWG) / 1.5(16AWG)
Rated current @ 20°C(A)	20		8	20			8	8		8	8 / 10
Rated Voltage(V)	300		300	300			300	160		160	160 / 160
Impulse voltage(V)	2500		2500	2500			1500	1500		1500	1500 / 1500
Overtoltage category	II										
Pollution Degree	III										

Part Number

Note: **FX** refer to panel mount hole F1:Φ2.7; F2: M2.5;F3:Φ3.2; F4: M3.0

Pins	Male	Female
6A	M23-SSPPSTF FX 06A	M23-SSPSSTF FX 06A
7A	M23-SSPPSTF FX 07A	M23-SSPSSTF FX 07A
9A	M23-SSPPSTF FX 09A	M23-SSPSSTF FX 09A
9B	M23-SSPPSTF FX 09B	M23-SSPSSTF FX 09B
9C	M23-SSPPSTF FX 09C	M23-SSPSSTF FX 09C
12A	M23-SSPPSTF FX 12A	M23-SSPSSTF FX 12A
12B	M23-SSPPSTF FX 12B	M23-SSPSSTF FX 12B
16A	M23-SSPPSTF FX 16A	M23-SSPSSTF FX 16A
17A	M23-SSPPSTF FX 17A	M23-SSPSSTF FX 17A
17B	M23-SSPPSTF FX 17B	M23-SSPSSTF FX 17B
19A	M23-SSPPSTF FX 19A	M23-SSPSSTF FX 19A