
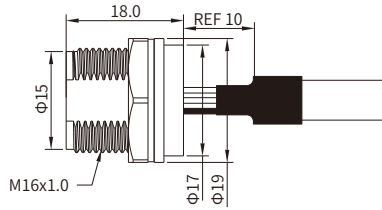


Mini-USB Straight Connector, Panel Mount, Solder, Front fastened

Female



RoHS

Specifications

Contacts	5P Mini B
Pin layout(Female)	
Ambient temperature	-25°C~+85°C(flexible installation),-40°C~+85°C(fixed installation)
Connector insert	PBT+GF
Connector contacts	Phosphor bronze with gold plated
Connector body	PA + GF
Coupling nut/screw	PA + GF
Seal/O-ring	FKM
Insulation resistance	≥100MΩ
Contact resistance	≤30mΩ
Shielding	Available
IP rating	IP67 in locked condition
Rated current	1A
Rated voltage	30V AC/DC

Part Number

Pins	Cable length	Female
5	1m	MB-WF05STSP-10CB
	3m	MB-WF05STSP-30CB
	5m	MB-WF05STSP-50CB

Default wire colors

Pin No.	
Pin 1	RD
Pin 2	WH
Pin 3	GN
Pin 4	BK
Shell	Braid

Panel Cut-out Dimensions

