


## D-Sub Male Panel Mount, Solder

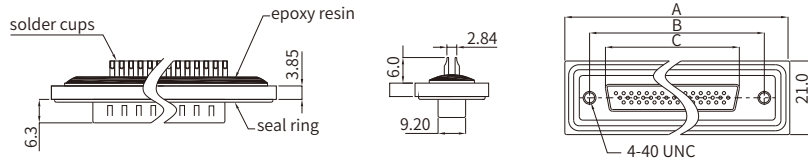

	FC P/N.	A	B	C
15P	HDBW15MSNS	39.4	25.0	16.92
26P	HDBW26MSNS	47.8	33.5	25.25
44P	HDBW44MSNS	64.5	47.04	38.96

RoHS

### Specifications

Contacts	15	26	44
Pin layout(Male)			
Ambient temperature	-25°C~+85°C(flexible installation), -40°C~+85°C(fixed installation)		
Connector insert	PBT+GF		
Connector contacts	Brass gold plated		
Coupling nut/screw	Brass nickel plated		
Seal / O-ring	FKM		
Insulation resistance	≥1000MΩ		
Contact resistance	≤10mΩ		
Shielding	Unavailable		
IP rating	IP67 in locked condition		
Rated current	5A		
Rated voltage	300V AC/DC		

### Part Number

Pins	Male
15	HDBW15MSNS
26	HDBW26MSNS
44	HDBW44MSNS

### Default wire colors

Pin No.		
Pin 1	BK	BU
Pin 2	RD	VT
Pin 3	PK	RD
Pin 4	GY	OR
Pin 5	LT GN	YE
Pin 6	GN	OR/BK
Pin 7	YE	BK
Pin 8	VT	WH
Pin 9	BK/WH	WH/BU
Pin 10	WH	WH/YE
Pin 11	LT BU	WH/OR
Pin 12	BU	BN/BK
Pin 13	BN	PK
Pin 14	OR	GN
Pin 15	BK/RD	BN
Pin 16		GN
Pin 17		BN
Pin 18		WH/GN
Pin 19		WH/BN
Pin 20		WH/RD
Pin 21		GY
Pin 22		WH
Pin 23		BU/BK
Pin 24		GY
Pin 25		BU
Pin 26		RD/WH