


PSA Straight Plug, Cable Collet

- Connector series: PSA
- Contact: Hermaphroditic
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PSA.XE.XXX.CLACXX
- Mated with: FSA series

Note: "X" refers to part number definition on page 101

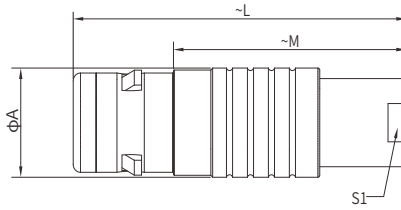

General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated


Seal/O-ring:	Silicone
Insulation resistance:	≥100MΩ
IP rating:	IP68
Shielding efficiency:	at 10MHz>95dB/at 1GHz>80dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)			
	A	L	M	S1
0E	11	34	23	8
1E	13	42	28	9
2E	16	52	36	12

PPP Straight Plug, Non-latching, Cable Collet

- Connector series: PPP
- Contact: Hermaphroditic
- Locking type: Non-latching
- Orientation type: Straight
- Part No.: PPP.XE.XXX.CLACXX
- Mated with: FSA series

Note: "X" refers to part number definition on page 101

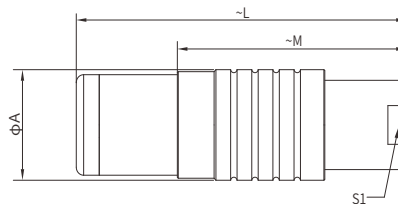

General Information

Ambient temperature:	-55°C ~ + 200°C
Endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

Seal/O-ring:	Silicone
Insulation resistance:	≥100MΩ
IP rating:	IP68
Shielding efficiency:	at 10MHz>95dB/at 1GHz>80dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)			
	A	L	M	S1
0E	11	34	23	8
1E	13	42	28	9