


PSG Straight Plug, Nut for Bend Relief, Key(G), Cable Collet

- Connector series: PSG
- Contact: Male
- Key: G(More keys, refer to page 66)
- Locking type: Self-locking
- Orientation type: Straight
- Part No.: PSG.XK.XXX.CLACXXZ
- Mated with: FSG/SRG series

Note: "X" refers to part number definition on page 48

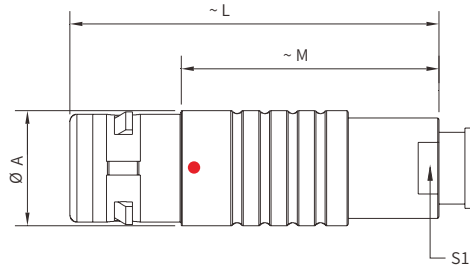

General Information



Ambient temperature:	-55°C~+200°C
Mating endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated


Seal/o-ring	Silicone
Insulation resistance:	≥ 100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>95dB / at 1GHz>80dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)			
	A	L	M	S1
0K	11	34	23	7
1K	13	42	28	9
2K	16	52	36	12
3K	19	60	40	15
4K	25	70	49	19

PAG Angled Plug, Nut for Bend Relief, Key(G), Cable Collet

- Connector series: PAG
- Contact: Male
- Key: G(More keys, refer to page 66)
- Locking type: Self-locking
- Orientation type: Angled
- Part No.: PAG.XK.XXX.CLACXXZ
- Mated with: FSG/SRG series

Note: "X" refers to part number definition on page 48

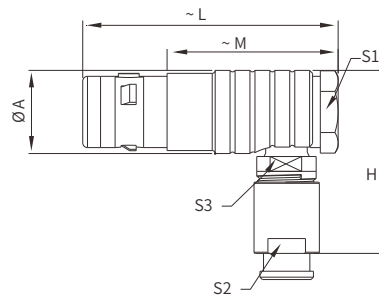

General Information



Ambient temperature:	-55°C~+200°C
Mating endurance:	>5000 cycles
Insulator:	PEEK
Connector contacts:	Brass with gold plated
Housing:	Brass with Cr plated

Seal/o-ring	Silicone
Insulation resistance:	≥ 100MΩ
IP rating:	IP 68
Shielding efficiency:	at 10MHz>95dB / at 1GHz>80dB
Salt spray corrosion test:	>144h

Size	Dimensions(mm)						
	A	L	M	H	S1	S2	S3
0K	11.5	36	23	28.5	10	8	8
1K	14.0	43	28	35.5	12	9	10
2K	17.5	51	36	40.0	15	12	13
3K	21.0	60	40	47.0	18	15	15