


M20 Plastic U-Adapter, Male-Female



RoHS

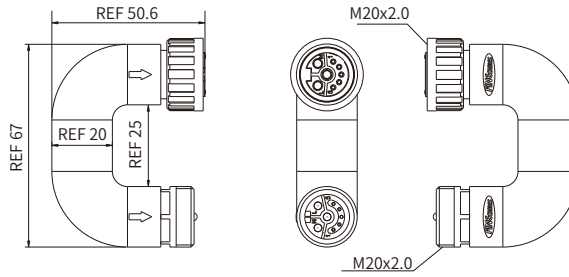

■ Specifications

Contacts	3+5
Pin layout(Male)	
Pin layout(Female)	
Ambient temperature	-20°C ~ +125°C
Connector insert	PBT
Connector contacts	Brass with gold plated
Coupling nut/screw	ASA
Seal/O-ring	Silicone
Insulation resistance	≥100MΩ
Contact resistance	≤5mΩ
Shielding	Unavailable
IP rating	IP67, IP68 in locked condition
Mating endurance	>500 cycles
Rated current	4A(signal 5Pins) / 13A(power 3Pins)
Rated voltage	300V AC / DC

■ Part Number

Pins	Male-Female
3+5	MA20UP-MF3+5

■ Circuit diagram

