


Mini-change(7/8")

Mini-change(7/8") Y-Splitter, Female-2* Male

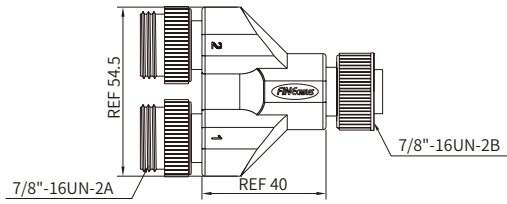

Specifications

Contacts	3	4	5
Pin layout(Male)			
Pin layout(Female)			
Ambient temperature	-25°C ~ +90°C		
Connector insert	TPU		
Connector contacts	Brass with gold plated		
Coupling nut/screw	Aluminium anodized black		
Connector overmold	TPU		
Seal/O-ring	FKM		
Insulation resistance	≥100MΩ		
Contact resistance	≤5mΩ		
Shielding	Unavailable		
IP rating	IP67, IP68 in locked condition		
Mating endurance	>500 cycles		
Rated current	13A		8A
Rated voltage	300V AC / DC		

Part Number

Pins	Female-2* Male
3	MT-071(MINI-C03MFMY-M)
4	MT-072(MINI-C04MFMY-M)
5	MT-073(MINI-C05MFMY -M)

Circuit diagram

