


# Solenoid Valve



## Valve Plug, Base Conn., Type A, Circular, with Hexagonal Nut

Male

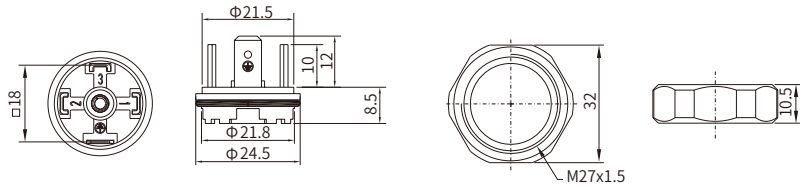

### Specifications

Contacts	3+PE	2+2PE	2+PE	3P	4P
Certification	ECBT2.E364453				
Pin layout(Male)					
Standard	DIN EN 175 301-803-A				
Ambient temperature	-30°C ~ +125°C				
Termination	Soldering				
Pin dimensions	6.3x0.8mm, 4.8x0.8mm				
Housing color	Black				
Housing material	PA+GF				
Contact	Brass with tin plated or nickel plated				
Central nut	Brass with nickel plated				
Rated voltage	400V				
Rated impulse voltage	4000V				
Rated current	16A				
Insulation resistance	≥100MΩ				
Contact resistance	≤4mΩ				
IP rating	IP 65 in locked condition				

### Part Number

03=circuit 3

Pins	Male
3+PE	VCAMA0331-1
2+2PE	VCAMA0322-1
2+PE	VCAMA0321-1
3P	VCAMA0303-1
4P	VCAMA0304-1