

## Product data sheet

# M16 Cables & Connectors

<https://finecables.com/m16-molded-cable/2396/>




Product description	M16 Female Straight Connector, Molded Cable, Contacts: 2, Unshielded, IP65/IP67
Part no.	MA16FAF02ST

### Illustration



### Scale drawing

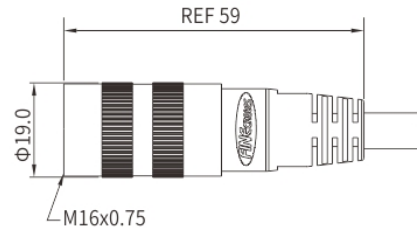

You can find the assembly instructions on the next page.

## General features

Part no.	<b>MA16FAF02ST</b>
Standard	IEC 61076-2-106
Ambient temperature	-25°C ~ +85°C (flexible installation)
Ambient temperature	-40°C ~ +85°C (fixed installation)
IP rating	IP65, IP67 in locked condition
Mating endurance	>100 cycles

## Electrical parameters

Insulation resistance	$\geq 100\text{M}\Omega$
Contact resistance	$\leq 5\text{m}\Omega$
Shielding	Unavailable
Rated current	7A(40°C)
Rated voltage	250V(100V) AC/DC
Wire gauge	0.75~0.25mm <sup>2</sup> (AWG18~20)

## Material

## Product data sheet

# M16 Cables & Connectors

<https://finecables.com/m16-molded-cable/2396/>



Product description	M16 Female Straight Connector, Molded Cable, Contacts: 2, Unshielded, IP65/IP67
Part no.	MA16FAF02ST
Connector insert	PBT
Connector contacts	Brass with gold plated
Connector overmold	TPU
Coupling nut/screw	Zinc alloy with nickel plated
Seal/O-ring	NBR/FKM

## Security Notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

The user must take suitable safety precautions to ensure that the connector cannot be accidentally disconnected.

Please observe the pollution degree and the overvoltage category. For further information, please refer to the download center "Technical Information".

Finecables Enterprise Co., Ltd

Email: [info@finecables.com](mailto:info@finecables.com)

Web: [www.finecables.com](http://www.finecables.com)

Tel: +86 0769-81517898

Address: No.54 Changdi Road, Nanmian Community Humen Town Dongguan City, Guangdong Province, China.